170mm

100mm

OPTONICA

USER MANUAL

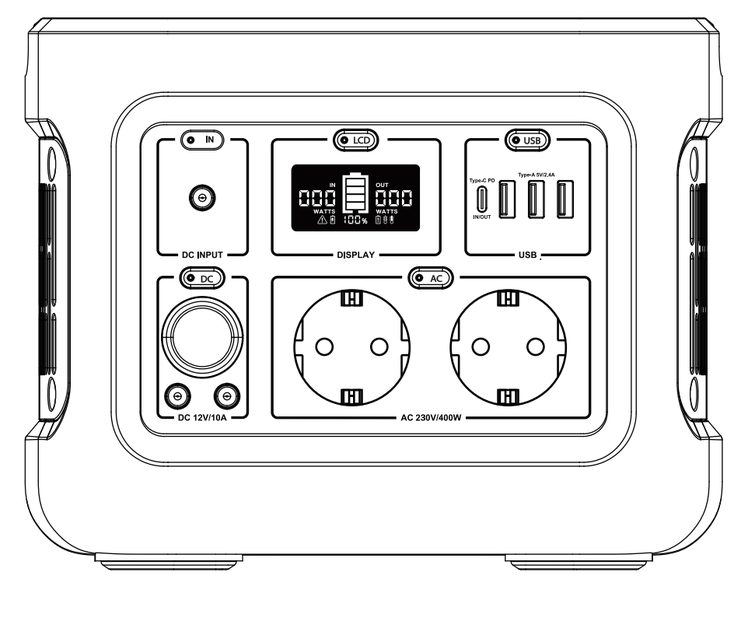

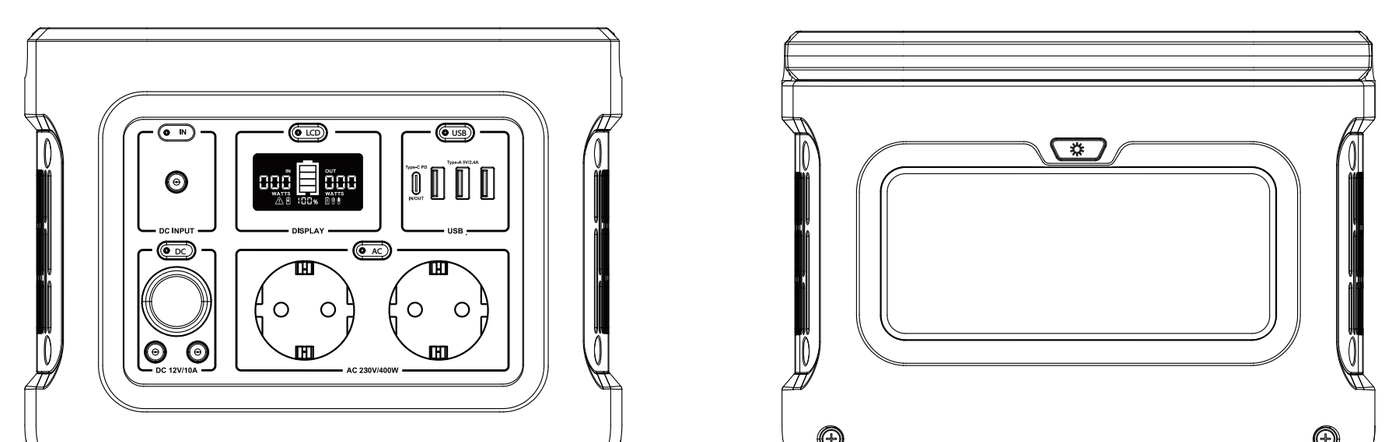

CHARGE FIRST! Before using your new power station, plug it into a suitable power outlet until it is fully charged. Then you can start your exciting journey with it.

IMPORTER: Prima Group 2004 LTD, Bulgaria, 1784 Sofia, Mladost 1, bl. 144, Ground Floor; Phone: +359 2 988 45 72;
IMPORTEUR: Prima Group 2004 LTD, Bulgarien, 1784 Sofia, Mladost 1, bl. 144, Erdgeschoss; Telefon: +359 2 988 45 72;
ВНОСИТЕЛ: Прима Груп 2004 ООД, България, 1784 София, Младост 1, бл. 144, Партер; Телефон: +359 2 988 45 72;

English

FAQs

1. What type of battery is in an Power Station?
Contains a battery pack which consists of an array of cylindrical Lithium-ion battery cells with high energy density.

2. How do I know if my Power Station is charged?
To Check the charge level of the, refer to the LCD battery Display.

3. Can I charge the while supplyiing power at the same time?
The power station could power the devices while recharging itself.

4. How do I know if my device will work with the ?
You will need to check the amount of power your device requires. This may require some research on your end. An online search or examining the user guide for your device should suffice. To be compatible with the you should use devices that require less than 400W.

WHAT'S IN THE BOX



Power Station

AC Adapter & AC Cable (2 Parts)

User Manual

SPECIFICATIONS

Output		
AC output	Rated voltage	230V
	Rated power	400W
	Peak power	800W
	Frequency	50Hz
DC*2 Output	Rated voltage	13.3V
	Rated current	10A
DC Output Ciger Socket	Rated voltage	13.3V
	Rated current	10A
USB-A*3 Output	Rated voltage	5V
	Rated current	2.4A
USB-C*1 Output	PD: 60W Max	5V3A, 9V3A,12V3A,15V3A,20V3A
Floodlight	Lux	200 Low / 800 Middle / 1400 high
Input		
DC Input	Rated voltage	12V-24V(0-10A)
	Rated power	Max 120W
USB-C*1 Input	PD: 60W Max	5V3A, 9V3A,12V3A,15V3A,20V3A
DC input and USB-C*1 input at the same time to recharge the power station, the input power can be up to 180W max		
Battery		
Rated capacity		320Wh
Battery cell type		Lithium-ion
General		
Working environment condition		Relative humidity: 20%-90%
		Temperature: 32-104°F (-10-40°C)
Size		237.2*195.2*190.6mm±5mm

WARRANTY

LCD

LED FLASHLIGHT

POWER

CHARGING

This is some common devices (within 400W)

Car Fridge (60W) Around 5.4 Hours
Phone (4000mAh) Around 27 Recharges
Refrigerator (120W) Around 2.7 Hours

RECHARGEMENT

ATTENTION

Not permitted on aircrafts.

To preserve the battery lifespan, please use and recharge at least once every 6 months.

Use original or certified charger and cables.

Avoid extreme temperature

DISCLAIMER

SAFETY INSTRUCTIONS

Deutsch

FAQs

LIEFERUMFANG

SPEZIFIKATIONEN

GARANTIE

BEDIENUNG

LCD

LED-TASCHENLAMPE

LADUNG

WIEDERAUFLADUNG

ACHTUNG

HAFTUNGSAUSSCHLUSS

SICHERHEITSHINWEISE

Français

FAQ

WHAT'S IN THE BOX

CARACTÉRISTIQUES

GARANTIE

LCD

LAMPE DE POCHE LED

POWER

MISE EN CHARGE

RECHARGEMENT

ATTENTION

DISCLAIMER

CONSIGNES DE SÉCURITÉ

Italiano

FAQ

COSA C'È NELLA SCATOLA

SPECIFICHE

GARANZIA

LCD

TORCIA ELETTRICA A LED

POTENZA

CARICA

RICARICA

ATTENZIONE

DISCLAIMER

ISTRUZIONI DI SICUREZZA

Български

ЧЕСТО ЗАДАВАНИ ВЪПРОСИ

СЪДЪРЖАНИЕ НА КУТИЯТА

ОТКАЗ ОТ ОТГОВОРНОСТ

LCD

ИНСТРУКЦИИ ЗА БЕЗОПАСНОСТ

МОЩНОСТ

СХЕМА